


DARK SKY REFLECTOR

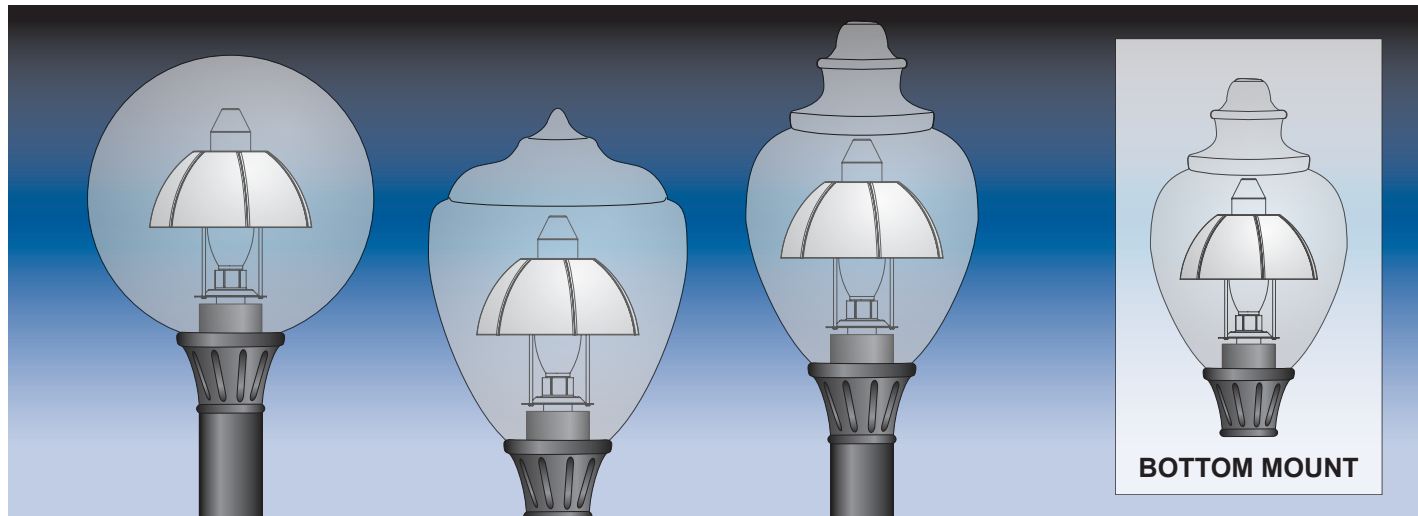

Keep The Traditional Look



99-DSR12-BMOG-ASS - for mogul base sockets

99-DSR12-BMED-ASS - for medium base sockets

Use With Most Traditional Streetlamps, Globes, & Acorns (for neck size 8" or larger, 7" min opening)

- High Downlight Efficiency
- Low Uplight Levels
- Ideal For Retrofits
- Easy To Install, Self Collapsing Design
- Coming Soon:
 - Top Mount Version
 - Type III Adaptor for Bottom Mount
 - Bottom Mount Bracket for Use With Glass Refractors
 - Smaller Unit for Use With Smaller Enclosures (i.e. 5.25" Opening & Larger)
- Easy Access for Lamp Replacement
- Made of High Heat Resin
- Self Positioning & Leveling
- Adjustable Light Output Levels
- Type V data shown below
- Use With 175W MH Max (237°F / 114°C)

	99-DSR12-BMOG-ASS WITH 20018-CL-8F	99-DSR12-BMOG-ASS WITH 88064-CL-8F	99-DSR12-BMOG-ASS WITH 88066-CL-8F
TOTAL LIGHT EFFICIENCY	69.9%	64.7%	66.3%
DOWNWARD LIGHT EFFICIENCY	68.6%	60.0%	60.0%
UPWARD LIGHT LOW (UL)	0.70%	2.78%	2.28%
UPWARD LIGHT HIGH (UH)	0.64%	1.94%	4.16%
MAX CANDLEPOWER ZONE	65°	67.5°	62.5°

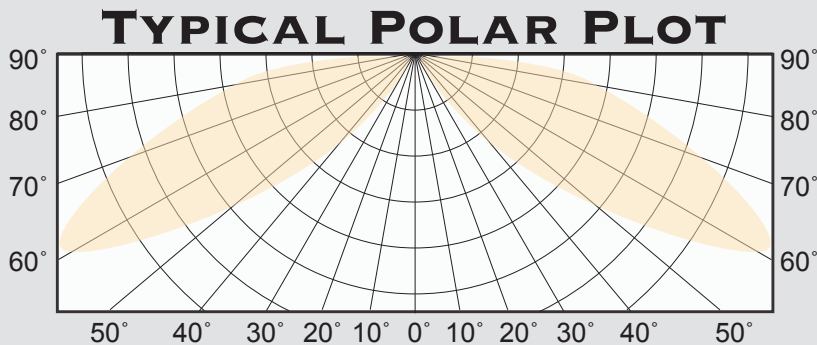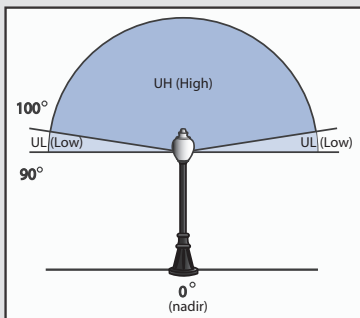

PATENT PENDING

CAUTION: Product should not be exposed to temperatures exceeding 237°F / 114°C (MAX Lamp 175W Metal Halide).



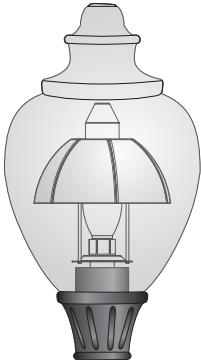
© 2008 Crown Plastics /1008

 **CROWN**
PLASTICS
PHONE 1.800.304.6463 • FAX 1.800.608.5446

918 Airport Road • Festus, MO 63028
www.plasticglobes.com

DARK SKY REFLECTOR

OPTICAL EVALUATION EXAMPLES OF DECORATIVE STREET LIGHTS

175 W MH RATED 15,000 LUMENS			
	99-DSR12-BMOG-ASS WITH 20018-CL-8F	99-DSR12-BMOG-ASS WITH 88064-CL-8F	99-DSR12-BMOG-ASS WITH 88066-CL-8F
Forward Light			
Luminaire Lumens	5140.8	4492.8	4493.7
%Lamp Lumens	34.27%	29.95%	29.96%
FL (0°-30°)	1.07%	0.73%	0.95%
FM (30°-60°)	14.12%	8.30%	9.91%
FH (60°-80°)	18.13%	15.82%	15.70%
FVH (80°-90°)	0.96%	5.10%	3.41%
Back Light			
Luminaire Lumens	5140.8	4492.8	4493.7
% Lamp Lumens	34.27%	29.95%	29.96%
BL (0°-30°)	1.07%	0.73%	0.95%
BM (30°-60°)	14.12%	8.30%	9.91%
BH (60°-80°)	18.13%	15.82%	15.70%
BVH (80°-90°)	0.96%	5.10%	3.41%
Uplight			
Luminaire Lumens	199.8	709.0	966.6
% Lamp Lumens	1.34%	4.73%	6.44%
UL (90°-100°)	.70%	2.78%	2.28%
UH (100°-180°)	.64%	1.94%	4.16%
Trapped Light			
Luminaire Lumens	4518.6	5305.5	5046.0
% Lamp Lumens	30.12%	35.37%	33.64%

PATENT PENDING

Contact our Sales Department at 800.304.6463 or visit us at www.plasticglobes.com for more information.

CAUTION: Product should not be exposed to temperatures exceeding 237°F / 114°C (MAX Lamp 175W Metal Halide).

© 2008 Crown Plastics /1008

 **CROWN**
PLASTICS
PHONE 1.800.304.6463 • FAX 1.800.608.5446

918 Airport Road • Festus, MO 63028
www.plasticglobes.com